


# DWC - Dual Wheeled Chock

*High adhesion, high capacity, & easy use for loading docks.*

**DWC Dual Wheeled Chocks are easy to use.** Hand-grab allows for fast placement and retrieval. Highly visible and durable.

**HGS chocks stay in place.** Heel-to-toe length allows for a steeper line of force between axle and rear teeth, and therefore an enhanced coefficient of friction. Compact structural design allows a test-to-failure well above maximum tire forces.

- Molded Aluminum Chocks
- Powder coated steel truck
- 39"H x 30"W x 12"L
- 19 lbs.

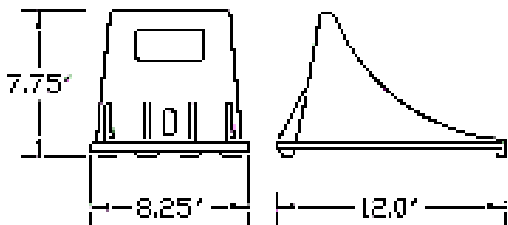

Easily manage heavy vehicle weights, large tire sizes,

## MATERIAL SAFETY DATA SHEET

### LARGE TIRE

Loading dock use.

### PERFORMANCE

Potentially in excess of 20,000 pounds resistant force [STATIC]