

HWC6-WHY Yellow, Handled



MODEL 1120315600

1906 Wheel Chock

6HY Handled Extrusion chock specifically designed for demanding off-road use. Will not harm blacktop. Non-sparking.

Solid bottom and a serrated tire contact area provide superior tire traction on all surfaces. This chock provides excellent protection under serious conditions.

- Extruded Aluminum
- SIZE: 6H x 6W x 10L
- WEIGHT: 3.7 lbs.

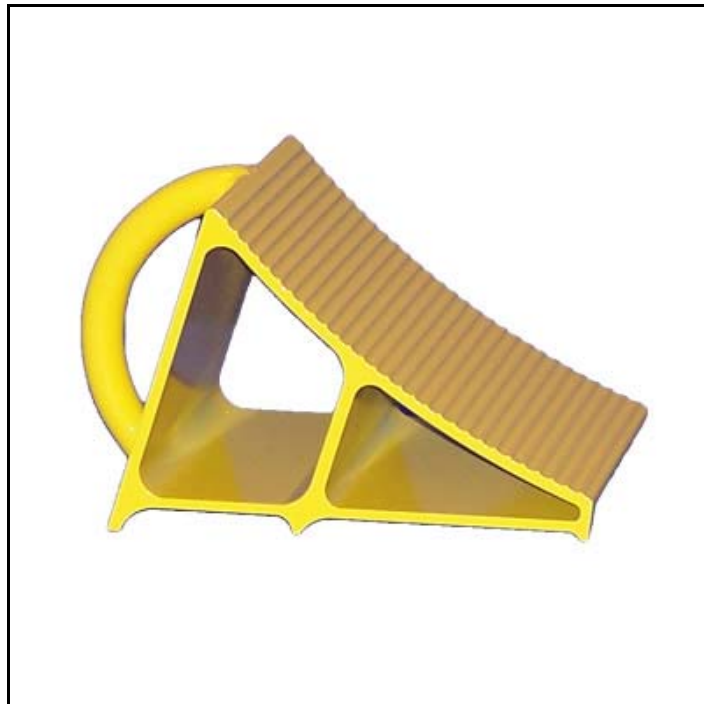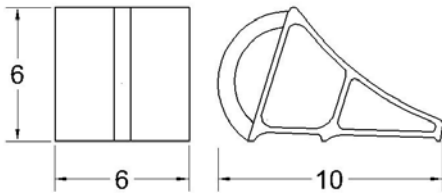

*“6HY” Featuring heavy-duty, welded grab handle.
Easy handling and soil-compression resistant.*

MATERIAL SAFETY DATA SHEET

| | |
|------------------------|---|
| LARGE TIRE SIZE | Resists soil compression, good for rural / off-road, Wildland use |
| PERFORMANCE | Effective single limit 15% (30% grade paired) 19.5 tires. |
| STANDARDS MET | SAE J348, NFPA1906, DOT (always use in pairs) |